


Electrothermic Actuator Head



t: 01923 249026 m: 07941 169635 w: www.gs-ufh.co.uk e: gs@warmfloors.co.uk

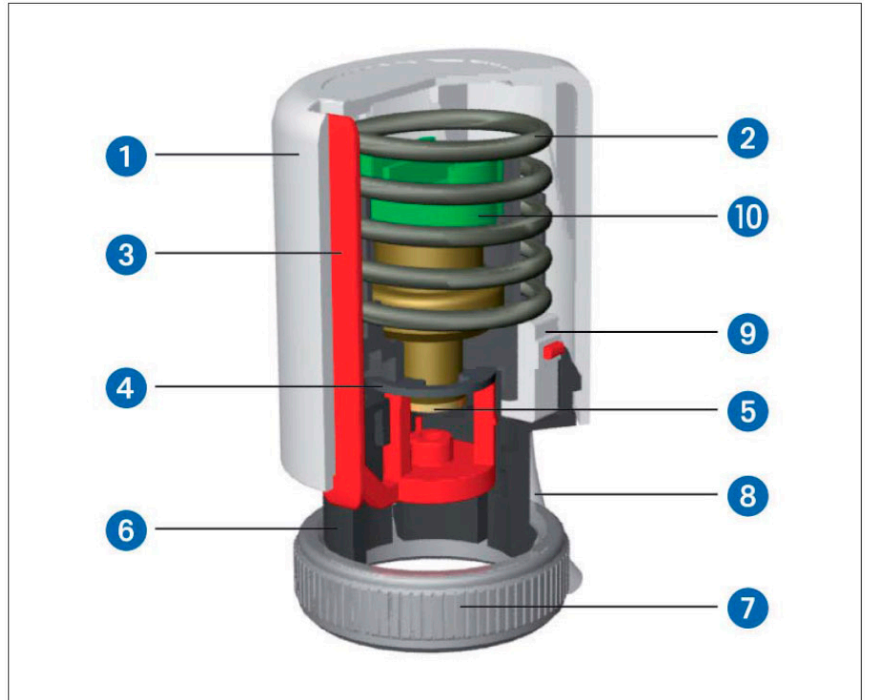

GS Underfloor Heating Ltd new generation electrothermic manifold actuator head is built around a sensitive wax/copper element to provide ultra responsive actuation. The unit includes a pop up indicator to show the valve in the open position, for ease of installation and maintenance.

The loose ring threaded mounting can be used one handed, and the oval body shape allows finger space between each head.

Voltage = 230v
24v

Construction

- A Polycarbonate casing
- B Stainless steel spring
- C Polycarbonate indicator

Steel radial stop ring

- E Brass shelf EN 12164 CW614N
- F Polycarbonate base
- G M30x1.5 brass ring nut EN 12164 CW614N nickel plated
- H PVC cable
- I Microswitch 5A
- J Wax expansion electrothermal actuator