



a new **liquid screed** solution




GS UNDERFLOOR
HEATING

from



McGRATHS
CONG

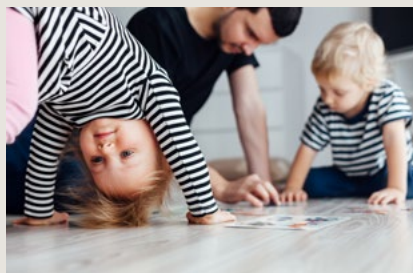

McGraths have teamed up with Cemexa Technologies of France to develop a new product for the production of cement based liquid screeds. Cemfloor is a high performance screed which complies with EN 13813.

During its 20 years of existence Cemexa Technologies has placed itself as a key player on the European market and one of the main active leaders of cement screed development.

There are 3 different products available in the Cemfloor range:

C16/F3

for domestic
non underfloor
heating

C20/F4

for domestic
and underfloor
heating

C25/F5

for
commercial
use

→ **CEMFLOOR** IS INSTALLED BY TRAINED AND COMPETENT
CONTRACTORS EXPERIENCED IN LIQUID SCREEDS



Thinner sections compared to traditional screeds. 25mm above underfloor heating pipes.

Larger floor area without joints (up to 150m²).

Exceptional Thermal Conductivity (up to 2.9W/m.k).

Reduced drying times 10 days for tiling and 28 days for wooden floors in non heated floors, in heated floors 14 days for tiling and 21 days for wooden floors. This is dependent on drying conditions or "after suitable moisture test.

Can be polished for final floor finish (consult technical personnel).


Self-compacting – no voids around under floor heating pipes.

key benefits

Foot traffic after 24 hours.

Minimal Drying Shrinkage (<0.1%).



Can be applied in wet areas.



GS UNDERFLOOR
HEATING

More thermal insulation can be used in floors, compared to traditional sand cement screed which leads to a better u value for your building.

All floor coverings can be applied with no need for surface sanding.

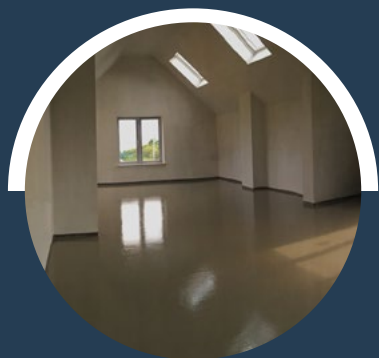

Can be forced dried after 7 days.



Compatible with all cement based tile adhesive, no priming of surface required.




No Surface Laitance (Dust) after curing.



Easy Installation; up to 1000m² per day (Reduces time & costs).



Lower Running costs for underfloor heating systems when using Cemfloor. This is due to the exceptional thermal conductivity of up to 2.9W/mk and the ability to lay thinner screeds over the underfloor heating pipes.



GS UNDERFLOOR
HEATING

Cemfloor screeds are very responsive to underfloor heating; due to the fact that they can be laid in very thin sections and have a high thermal conductivity of up to 2.9w/mk.

TRADITIONAL SCREED

1.2 W/m°K

7.5cm



HEATED FLOOR




GS UNDERFLOOR
HEATING

ISOLANT



2.9 W/m°K

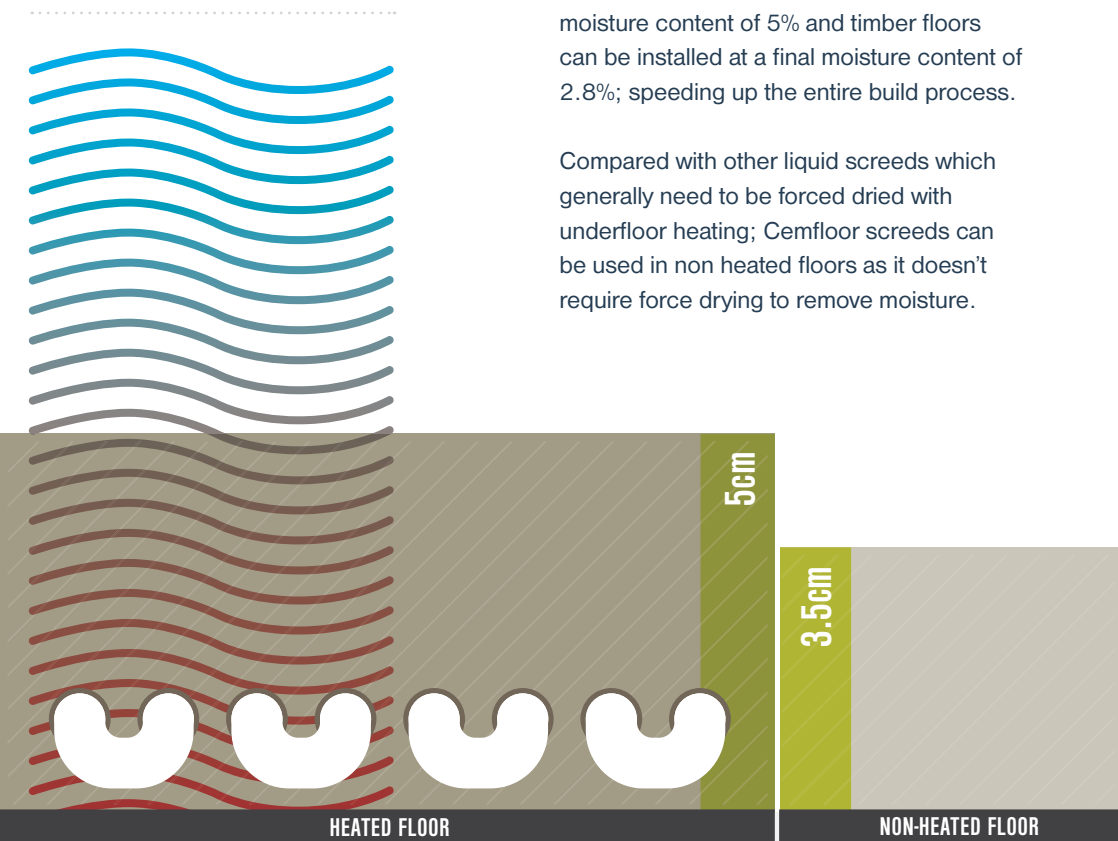


Since Cemfloor is a cement based screed; floor coverings can be applied much faster than calcium sulphate screeds which require a final moisture content of 0.5% which can delay floor finishings by months.

Whereas Cemfloor can be tiled at a final moisture content of 5% and timber floors can be installed at a final moisture content of 2.8%; speeding up the entire build process.

Compared with other liquid screeds which generally need to be forced dried with underfloor heating; Cemfloor screeds can be used in non heated floors as it doesn't require force drying to remove moisture.

ISOLANT



GS UNDERFLOOR
HEATING

additional information



SUBSTRATE

Cemfloor Screed is designed for use as a bonded thick levelling screed on concrete, as a floating screed over thermal or acoustic insulation, or as an unbonded screed on top of a plastic membrane.



FLOOR COVERING

Cemfloor is compatible with all floor coverings and cementitious adhesives and floor levellers.





APPLICATION

Cemfloor screeds should be used in accordance with BS 8204-7:2003 'Code of Practice for Pumpable Self-Smoothing Screeds'.

To ensure a high quality screed it is recommended that application is carried out by a specialist screeding contractor. The freshly poured screed will need to be levelled using a dappling bar, ensuring to dapple the surface in two passes at 90 degrees.



technical information

Cemfloor is produced in an ISO 9001 quality-controlled environment. Self levelling screeds produced with Cemfloor meet the requirements of EN 13813:2002 'Screed Material for Floor Screeds'.

SCREED SPECIFICATION	EN 13813:2002
Compressive Strength	>20 N/mm ²
Flexural Strength	>5 N/mm ²
Minimum Thickness	Bonded: 20mm Unbonded: 30mm Domestic: 35mm Commercial: 40mm Over underfloor heating pipes: 25mm above pipes
Shrinkage (28 Days)	<0.1%
Flow Rate	220–250mm
Thermal Conductivity	up to 2.9W/mk
Fire Rating	non-combustible
Drying Time (5% MC)	10 - 15 Days (can be force dried after 7 days)
Open to Light Foot Traffic	24 Hours
Wear resistance "BCA"	see website

ENQUIRIES

info@mcgraths.ie

info@congal.com





a new **liquid screed** solution



GS UNDERFLOOR
HEATING



HEAD OFFICE

McGraths Limestone (Cong) Ltd,
Cregaree Quarries, Cong,
Co. Mayo, F31 W425, Ireland

UK OFFICE

Rothsay, Clydebank, West Dunbartonshire
Glasgow, G81 1BG, Scotland

GS UNDERFLOOR HEATING

14 The Gateway,
London, WD18 7HW

Phone/Fax 01923 249026
Mobile 07941 169635
Email gs@warmfloors.co.uk



www.mcgraths.ie/cemfloor



www.congcal.com/cemfloor

